


T h e C u s t o m e r s C r e a t e , K O R E E L

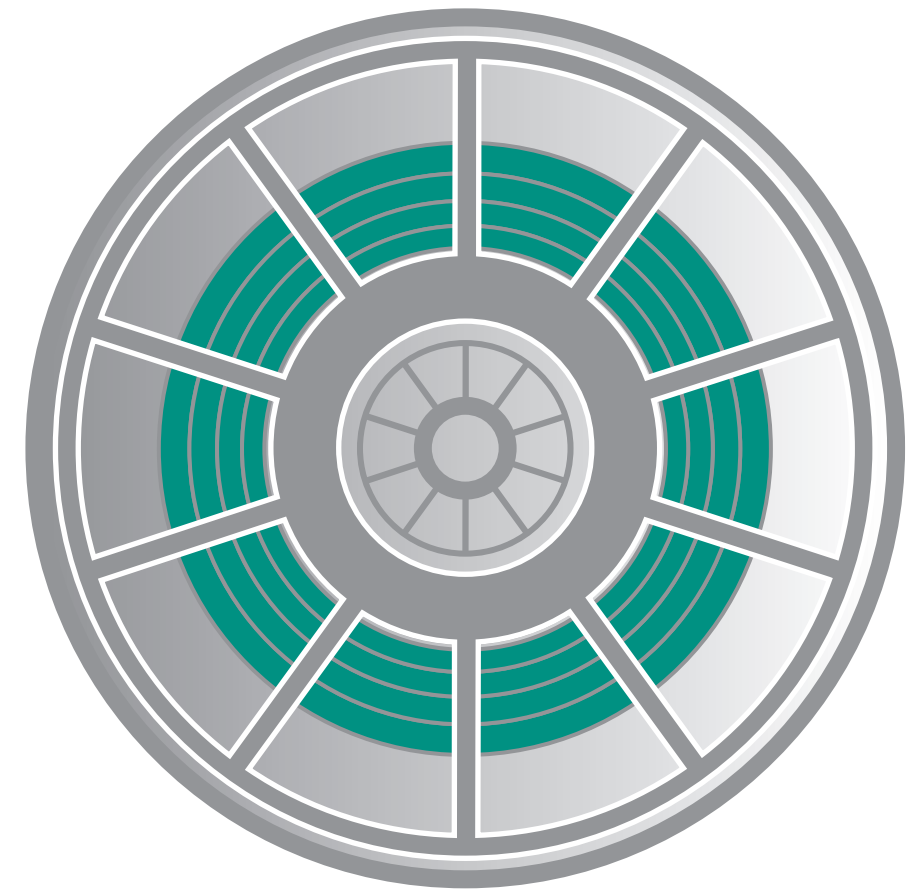

KOREEL CO., LTD.

•Head office and Factory : 48, Gaseok-ro, Seo-gu, Incheon, Korea
Overseas Dept,DIR : +82-70-4010-3061
Fax : +82-32-584-6862
<http://www.koreel.com>
Korean alphabet domain : 호스릴, 케이블릴
E-mail : overseas@koreel.com

•The second factory : 884-2(Gunjang National Industrial Complex) Osikdo-dong Gunsan Jeolabukdo

www.koreel.com

Thank you for your attention and interest in KOREEL.

Since KOREEL Co.,Ltd is established on January 1991. Through wise judgement of executive team and helps of the skillful and devoted employees, we could manage our company continually by ourselves even though when we faced with a lot of challenges.

Through continuous investing R&D department and interest of our client, we could be survived in frontier markets of industrial reel.

Our company was established for substituting imported reels. We always made our policies for solving our client's problems first than our revenue. So, eventually, our company could have been forced small quantity batch production company.

By the way, we had been suffered from lots of financial problem and hard situation to manage small quantity batch production company before. But we consolidated the foundation to business with overseas markets from the basis of many experiences from hard situation. We have overcome from the hard situation. and now it is one of our strength in industrial reel market.

AEO-certificate (Authorized Economic Operator) is our big achievement for exporting our products to overseas markets safely. our company has been grown not only in technical skills and quality but also financial organization and scale of sales and fabrication.

As our web-site and brochure are shown, KOREEL's products are being applied all kind of products in various machine equipments and equipment elemental technologies. Furthermore, demand of the reels has been steadily increasing for applying as mechanical elements globally.

All over the world's clients have been cooperated with us and contributed the development of KOREEL's products. the world is big and huge to do business. That is our joyful and happiness for our business with our client and that is why we do our best for our clients

There is something to ask you. We always look forward to your continued interest and encouragement. Then, we can maintain ourselves with earnest.

Thank you very much.

KOREEL Co., Ltd
President. Oh-Hyunkyu.

1991	01	Established SAMKOOK Industrial Co., Ltd.,
1991	06	Established a corporation of SAMKOOK Industrial Co., Ltd.,
1991	08	Selected as a developer of machinery parts and materials by Ministry of Commerce, Industry and Energy
1992	05	Registered as a supplier of subsidiary materials for KIA Motors Corps and HYUNDAI Motors
1993	02	Developed the Motor-Counted Cable Reel
1994	05	Registered as a supplier of GM DAEWOO Motors(SE31)
1999	11	Acquired ISO 9002 Certificate
2000	07	Designated as a 'Promising small and medium business for export' (No. 2003-30)
2000	11	Acquired CE (Hydraulic hose reel, Air reel)
2001	07	Finished joint development of one-stop welding carriage with KOSHA(Selected as an item of CLEAN project)
2002	09	Moving and enlarging the factory and office(Gajwa 3-dong, Seo-gu, Incheon
2003	11	Developed a Crane reel for harbour crane
2004	06	Completed the development of Rail System exhaust hose Reel (Patent No. 0451313)
2004	06	Developed the Water reel for balcony and veranda
		Water reel for balcony and veranda: Patent No.0451313
2005	07	Acquired CE certificate(Package Type Oil Hose Reel, Air Hose Reel N.S Type)
2005	11	Acquired ISO9001 Certificate
2006	12	Finished the development of Magnet Coupler Type Cable Reel
2007	02	Selected as a 'Promising small and medium business' by the Industrial Bank of Korea
2007	12	Acquired ISO 14001, Environment system Certificate
2007	12	Awarded the grand prize of the export promotion business(The prize of the mayor of Incheon metropolitan city
2009	03	Selected as an participant of 500 projects for the export business promotion(Small and Medium Business Administration)
2009	11	Won the award for \$1million export and the prize of the Minister of Knowledge Economy
2010	03	Registered the patent on the power supply cable reel for an excavator(No.10-09517715)
2010	04	Selected as the brand company guaranteed by KOTRA
2010	06	Registered a supplier of HYUNDAI Heavy Industries Co., Ltd.
2010	07	Completed the second factory in Gunsan(Factory site size: 6,611.50m ²) - 884-2, Osik-dong(Inside of Gunjang industrial complex, Jeonbuk)
2010	11	Selected as one of the 100 key promotion companies by Korea Institute of Science and Technology Information(KISTI)
2011	04	Developed Electric-Excavator Arm Type (Patent 10-1031027)
2011	06	Acquired Certification of Company Laboratory
2012	02	Selected as a Global Hidden Champion(SMBC)
2012	12	Developed The inverter motor type cable reel
2013	07	Changed company name
2014	04	made a supply contract with Grainger,USA
2014	07	Obtained AEO certification



Contents

Real Symbol of Reel **KOREEL**

Enclosed Type (Air Hose Reel)



1. AIR HOSE REEL05

- Enclosed type
- Open type

2. WATER HOSE REEL 11

- Enclosed type
- Open type

3. CABLE REEL 19

- Enclosed type
- Open type
- Portable type

4. OIL, GREASE & HIGH PRESSURE HOSE REEL 21

- Enclosed type
- Open type

5. OXYGEN, LPG GAS HOSE REEL25

- Reel
- Carrage

6. EXHAUST HOSE REEL27

7. SPRING BALANCER30

8. AIR TUBE & HOSE32

- Polyurethane Tube (PUT)
- polyethylene Tube (PET)
- Nylon Tube (NT)


9. AIR COIL TUBE33

- PU
- PE


Air Hose Reel can be conveniently employed in the industrial sites using pressed air. It is designed with a flexible air hose and a special spring, which prevents it from leaking and maintains its rolling power. Additionally, it has simple structure to install and use with ease. It also raises the work efficiency and keep work places organized.

PAR Type (Material : ABS plastic case)

- Use : Construction site, Industrial site, Laboratory
- Features : Automatic rewind
- Installation : Wall mounting type



Model	Hose			W.P Max (kg/cm ²)	External Size (mm)			Weight (kg)
	Material	I.D-O.D(Ø)	L (M)		A	B	C	
PAR-810	PU	8-12	10	15	440	177	360	9,4
PAR-815	PU	8-12	15	15	440	177	360	9,5
PAR-820	PU	8-12	20	15	505	177	421	10,2
PAR-830	PU	8-12	27	15	505	177	421	11,5
PAR-1110	PU	11-16	10	15	440	177	360	10,0
PAR-1115	PU	11-16	15	15	505	177	421	11,2
PAR-1120	PU	11-16	20	15	505	177	421	11,7
PAR-810F	PVC	8-13	10	15	440	177	360	9,5
PAR-815F	PVC	8-13	15	15	440	177	360	9,6
PAR-820F	PVC	8-13	20	15	505	177	421	10,7
PAR-830F	PVC	8-13	27	15	505	177	421	12,1
PAR-1310F	PVC	13-21	10	15	505	177	421	10,7

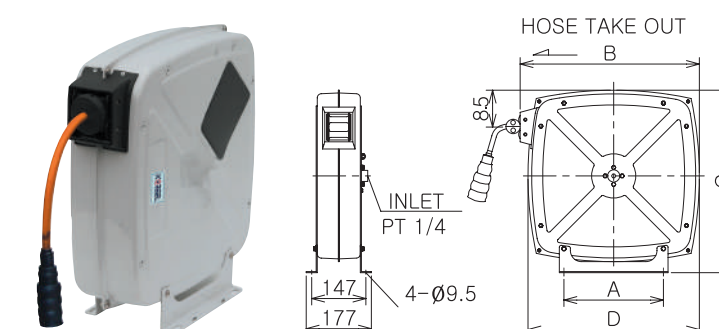

EAR Type (Material : Steel case)

- Use : Construction site, Industrial site, Laboratory
- Features : Automatic rewind
- Installation : Wall mounting type

Model	Hose			W.P Max (kg/cm ²)	External Size				Weight (kg)
	Material	I.D (mm)	L (M)		A	B	C	D	
EAR-810	PU	8	10	15	190	426	435	405	12,7
EAR-815	PU	8	15	15	190	426	435	405	14,2
EAR-820	PU	8	20	15	190	426	435	405	17
EAR-825	PU	8	25	15	190	426	435	405	21
EAR-830	PU	8	30	15	190	426	435	405	23
EAR-1110	PU	11	10	15	190	426	435	405	16
EAR-1115	PU	11	15	15	190	426	435	405	20
EAR-1120	PU	11	20	15	190	426	435	405	23

Enclosed Type (Air Hose Reel)



Air Swivel Joint & Multi Reel Box

It features that various auto reels are built in an integrated case, which make it tidy and efficient the workplace where a power cord and compressed air are used. Each auto reel is an easy to use and consists of polyurethane braided hose and high durability spring. It is the most preferred product by professional service centers.

CR Type

(Material : Steel Case)

- Use : Car service center, Industrial site, Laboratory
- Features : All-in-one steel case, Polyurethane braided hose
- Installation : Wall, Ceiling (Within 4M height, If installed over 4M, it could not rewind.)



Model	Air Hose Reel			Cord reel		External Size		Component	Weight (kg)
	Material	I,D (mm)	L (M)	Cable	L (M)	A	B		
CR-815-2	PU	8	15	VCT X1,5 X3C	15	335	—	Air X1, Electricity1	21
CR-815-2S	PU	8	15	VCT X1,5 X3C	15	335	—	Air X2	20
CR-815-3	PU	8	15	VCT X1,5 X3C	15	—	500	Air X2, Electricity1	30,3




Open Type (Air Hose Reel)

Air Hose Reel




SJ Type (Air Reel)

- Use : Construction site, industrial site, Laboratory
- Features : Compact size, Automatic rewind, Single steel frame
- Installation : Wall, Ceiling

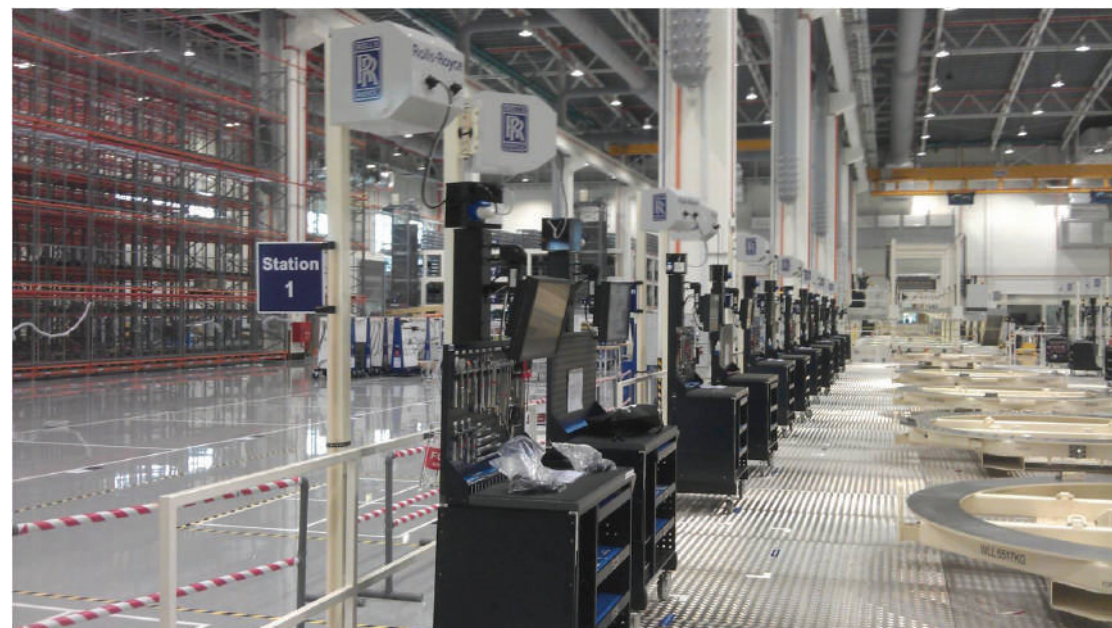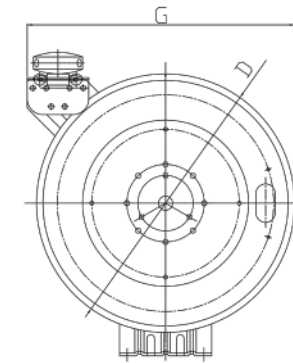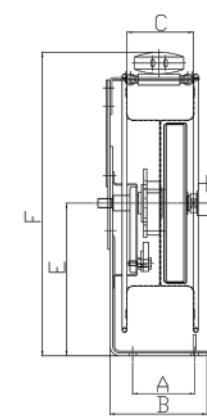

Model	Hose			W.P Max (kg/cm ²)	External Size							Weight (kg)
	Material	I,D (mm)	L (M)		A	B	C	D	E	F	G	
SRA-810	PU,PP	8	10	15	101	158	105	Ø420	248	493	435	17
SRA-815	PU,PP	8	15	15	101	158	105	Ø420	248	493	435	18
SRA-820	PU,PP	8	20	15	101	158	110	Ø500	288	578	517	19
SRA-1110	PU,PP	11	10	15	101	158	105	Ø420	248	493	435	18
SRA-1115	PU,PP	11	15	15	101	158	105	Ø420	248	493	435	19
SRA-1120	PU,PP	11	20	15	101	158	110	Ø500	288	578	517	24

Open Type (Air Hose Reel)

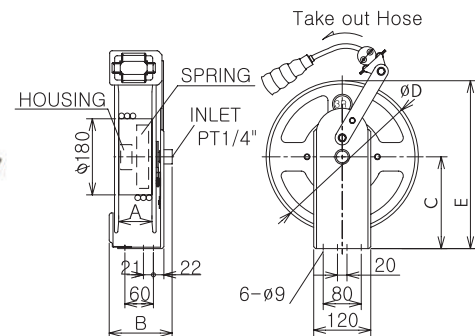



RA-N Type

- Use : Car service center, Industrial site, Laboratory
- Features : Light weight frame, Flexible hose, Easy installation
- Installation : Wall, Ceiling (Within 4M height, If installed over 4M, it could not rewind.)
(If the total order quantity is over than 500 sets, The reel body color can be customised as buyer's request)

Model	Hose			W.P Max (kg/cm ²)	External Size					Weight (kg)
	Material	I,D (mm)	L (M)		E	A	B	C	D	
RA-610N	PU	6,5	10	15	353	76	135	193	320	6,4
RA-615N	PU	6,5	15	15	353	76	135	193	320	7
RA-620N	PU	6,5	20	15	353	76	135	193	320	7,6
RA-625N	PU	6,5	25	15	353	76	135	193	320	8
RA-630N	PU	6,5	27	15	353	76	135	223	350	8,5
RA-810N	PU	8	10	15	353	76	135	193	320	6,7
RA-815N	PU	8	15	15	353	76	135	193	320	7,5
RA-820N	PU	8	20	15	353	76	135	193	320	8
RA-825N	PU	8	25	15	398	76	135	223	350	8,3
RA-830N	PU	8	27	15	398	76	135	223	350	8,5
RA-1110N	PU	11	10	15	353	76	135	193	320	7,6
RA-1115N	PU	11	15	15	398	76	135	223	350	8
RA-1120N	PU	11	20	15	398	96	155	223	350	8,5
RA-810NF	Synthetic Rubber	8	10	15	353	76	135	193	320	8
RA-815NF	Synthetic Rubber	8	15	15	353	76	135	193	320	8,4
RA-820NF	Synthetic Rubber	8	20	15	353	76	135	193	320	9
RA-825NF	Synthetic Rubber	8	25	15	398	76	135	223	350	11,7



B Type

- Use : Construction site, Industrial site, Laboratory
- Features : Automatic rewind, Solid frame
- Installation : Movable
- Body : 3 sizes (Large, Medium, Small)



Model	Hose			W.P Max (kg/cm ²)	External Size			Weight (kg)
	Material	I.D (mm)	L (M)		A	B	C	
RA-630B	PU	6,5	30	15	370	320	390	13,5
RA-830B	PU	8	30	15	370	320	390	15
RA-840B	PU	8	40	15	450	350	460	16
RA-850B	PU	8	50	15	450	350	460	21
RA-1120B	PU	11	20	15	370	320	390	14
RA-1130B	PU	11	30	15	370	320	390	16,4
RA-1150B	PU	11	50	15	450	400	460	24


Open Type (Air Hose Reel)



ST Type

- Use : Car service center, Industrial site, Laboratory
- Features : Light weight frame, Flexible synthetic rubber hose
- Installation : Wall, Ceiling (Within 4M height, If installed over 4M, it could not rewind.)

Model	Hose			W.P Max (kg/cm ²)	Weight (kg)	Remark
	Material	I.D (mm)	L (M)			
RA-820ST	PU	8	20	15	11,7	
RA-830ST	PU	8	30	15	13,5	
RA-1115ST	PU	11	15	15	10,5	
RA-1120ST	PU	11	20	15	11,7	
RA-1125ST	PU	11	25	15	11,7	
RA-1310ST	PVC	13	10	15	11	
RA-1315ST	PVC	13	15	15	12	

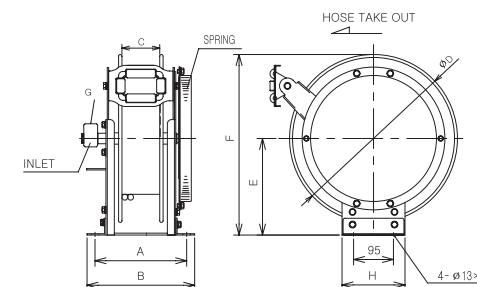


SK Type

- Use : Large and medium sized service center, Industrial site
- Features : Solid frame, Long-lasting sealing, Powerful spring
- Installation : Wall, Ceiling (Within 4M height, If installed over 4M, it could not rewind.)

Model	Hose			W.P Max (kg/cm ²)	External Size								Weight (kg)
	Material	I.D (mm)	L (M)		A	B	C	D	E	F	G	H	
RA-1320	Synthetic Rubber	13	20	15	278	318	150	450	260	485	PT1/2"	150	27
RA-1325	Synthetic Rubber	13	25	15	278	318	150	500	290	540	PT1/2"	150	30
RA-1330	Synthetic Rubber	13	30	15	278	318	150	500	290	540	PT1/2"	150	32,4
RA-1340	Synthetic Rubber	13	40	15	338	378	210	500	290	540	PT1/2"	200	40
RA-1350	Synthetic Rubber	13	50	15	338	378	210	500	290	540	PT1/2"	200	45
RA-1610	Synthetic Rubber	16	10	15	278	318	150	450	260	485	PT1/2"	150	26
RA-1615	Synthetic Rubber	16	15	15	278	318	150	450	260	485	PT1/2"	150	29
RA-1620	Synthetic Rubber	16	20	15	278	318	150	500	290	540	PT1/2"	150	32
RA-1625	Synthetic Rubber	16	25	15	338	378	210	500	290	540	PT1/2"	200	36
RA-1630	Synthetic Rubber	16	30	15	338	378	210	500	290	540	PT1/2"	200	40
RA-1640	Synthetic Rubber	16	40	15	338	378	210	550	315	590	PT1/2"	200	45
RA-1910	Synthetic Rubber	19	10	15	338	378	210	450	290	515	PT3/4"	200	28,7
RA-1915	Synthetic Rubber	19	15	15	338	378	210	450	290	515	PT3/4"	200	34
RA-1920	Synthetic Rubber	19	20	15	338	378	210	500	290	540	PT3/4"	200	38
RA-1925	Synthetic Rubber	19	25	15	338	378	210	550	315	590	PT3/4"	200	42
RA-1930	Synthetic Rubber	19	30	15	338	378	210	550	315	590	PT3/4"	200	45
RA-2510	Synthetic Rubber	25	10	15	338	378	210	450	290	515	PT1"	200	35
RA-2515	Synthetic Rubber	25	15	15	338	378	210	500	315	565	PT1"	200	38
RA-2520	Synthetic Rubber	25	20	15	408	448	280	500	315	565	PT1"	200	43,6
RA-2525	Synthetic Rubber	25	25	15	408	448	280	550	345	620	PT1"	200	48,6
RA-2530	Synthetic Rubber	25	30	15	408	448	280	550	345	620	PT1"	200	50,5


Open Type (Air Hose Reel)

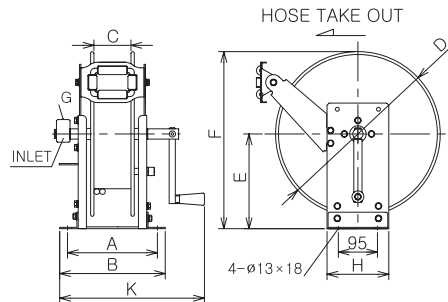

RM Type Manual Rewind

- Use : Large and medium sized service center, Industrial site
- Features : Solid frame, Manual rewind
- Installation : Fixed to the floor


Model	Hose			W.P Max (kg/cm ²)	External Size										Weight (kg)
	Material	I.D (mm)	L (M)		A	B	C	D	E	F	G	H	K		
RM-1320	Synthetic Rubber	13	20	15	278	318	150	450	260	485	PT1/2"	150	420	17	
RM-1330	Synthetic Rubber	13	30	15	278	318	150	500	290	540	PT1/2"	150	420	20,4	
RM-1340	Synthetic Rubber	13	40	15	338	378	210	500	290	540	PT1/2"	200	480	23	
RM-1350	Synthetic Rubber	13	50	15	338	378	210	500	290	540	PT1/2"	200	480	27	
RM-1620	Synthetic Rubber	16	20	15	278	318	150	500	290	540	PT1/2"	150	420	20	
RM-1630	Synthetic Rubber	16	30	15	338	378	210	500	290	540	PT1/2"	200	480	25,2	
RM-1640	Synthetic Rubber	16	40	15	338	378	210	550	315	590	PT1/2"	200	480	32	
RM-1650	Synthetic Rubber	16	50	15	408	448	280	550	345	620	PT1/2"	200	550	40	
RM-1920	Synthetic Rubber	19	20	15	338	378	210	500	290	540	PT3/4"	200	480	26	
RM-1930	Synthetic Rubber	19	30	15	338	378	210	550	315	590	PT3/4"	200	480	34	
RM-1940	Synthetic Rubber	19	40	15	408	448	280	550	345	620	PT3/4"	150	550	41	
RM-2520	Synthetic Rubber	25	20	15	408	448	280	500	315	565	PT1"	200	550	30	
RM-2530	Synthetic Rubber	25	30	15	408	448	280	550	345	620	PT1"	200	550	36	

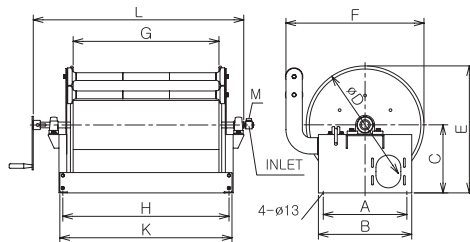

ASB Type Manual Rewind

- Use : Large and medium sized service center, Construction site, Industrial site, Specially-equipped vehicle
- Features : Solid frame, Permanent sealing, Manual rewind
- Installation : Floor, Vehicles

Model	Hose			W.P Max (kg/cm ²)	External Size											Weight (kg)
	Material	I.D (mm)	L (M)		A	B	C	D	E	F	G	H	K	L	M	
ASB-13100	Synthetic Rubber	13	100	15	430	480	325	550	600	660	500	605	635	840	PT1/2"	35
ASB-16100	Synthetic Rubber	16	100	15	430	480	350	600	650	710	600	720	750	940	PT1/2"	41
ASB-1950	Synthetic Rubber	19	50	15	430	480	325	550	600	660	500	605	635	840	PT3/4"	35
ASB-2550	Synthetic Rubber	25	50	15	430	480	350	600	650	710	600	720	750	940	PT1"	41

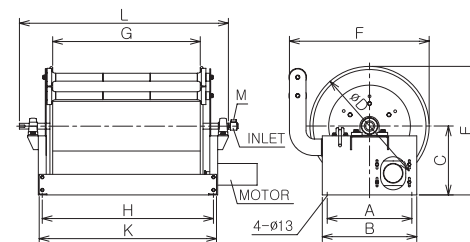

ASBM Type Motor Rewind

- Use : Large and medium sized service center, Construction site, Industrial site, Specially-equipped vehicle
- Features : Solid frame, Long-lasting sealing, Electric motor type (AC/DC)
- Installation : Floor, Vehicles

Model	Hose			W.P Max (kg/cm ²)	External Size											Weight (kg)	Voltage
	Material	I.D (mm)	L (M)		A	B	C	D	E	F	G	H	K	L	M		
ASBM-13200	Synthetic Rubber	13	200	15	430	480	350	600	650	710	650	770	800	960	PT1/2"	46	DC24V
ASBM-16100	Synthetic Rubber	16	100	15	430	480	350	600	650	710	600	720	750	910	PT1/2"	46	DC24V
ASBM-1950	Synthetic Rubber	19	50	15	430	480	325	550	600	600	600	720	750	910	PT3/4"	40	DC24V
ASBM-19100	Synthetic Rubber	19	100	15	430	480	350	600	650	710	650	770	800	960	PT3/4"	46	DC24V
ASBM-2550	Synthetic Rubber	25	50	15	430	480	350	600	650	710	600	720	750	910	PT1"	46	DC24V
ASBM-25100	Synthetic Rubber	25	100	15	430	480	380	650	705	760	750	870	900	1060	PT1"	53	DC24V


Enclosed Type (Water Hose Reel)




It is package type water hose reel which is designed for gardening and cleaning. There are two package type. one is ABS plastic the other one is steel. It is designed with a flexible water hose and a special spring, which prevents it from leaking and maintains its rolling power. Additionally, it has simple structure to install and use with ease.

PWR Type (Material : ABS plastic case)

- Use : Gardening, Cleaning
- Features : Automatic rewind
- Installation : Wall mounting type



Model	Hose			W.P (BAR)	External Size (mm)			Weight (kg)
	Material	I.D-O.D(Ø)	L (M)		A	B	C	
PWR-1110	Non-toxic hose	11-16	10	5	440	177	360	10,5
PWR-1115	Non-toxic hose	11-16	15	5	505	177	421	11,0

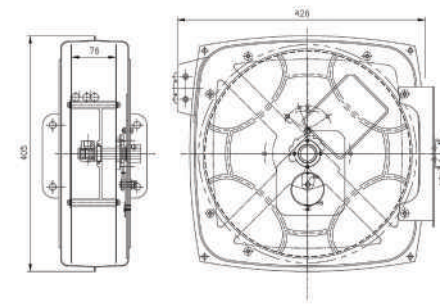

SWR Type (Material : Steel case)

- Use : Gardening, Cleaning
- Features : Automatic rewind
- Installation : Wall mounting type

Model	Hose			W.P (BAR)	Weight (kg)	Size H x D x W	Remark
	Material	I.D-O.D(Ø)	L (M)				
SWR-1110	Non-toxic hose	11-16	10	5	16,0	426*405*177	
SWR-1115	Non-toxic hose	11-16	15	5	17,0	426*405*177	

Water Hose Reel


Stainless Steel Reel for Kitchen/Restaurant

It can maintain the job site clean by using stainless material. The life cycle of hose also can be extended 4~5 times.


WF, TWA Type



WF-Type

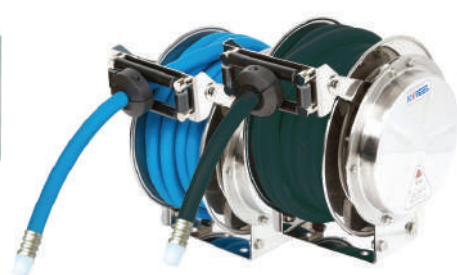

TWA-Type

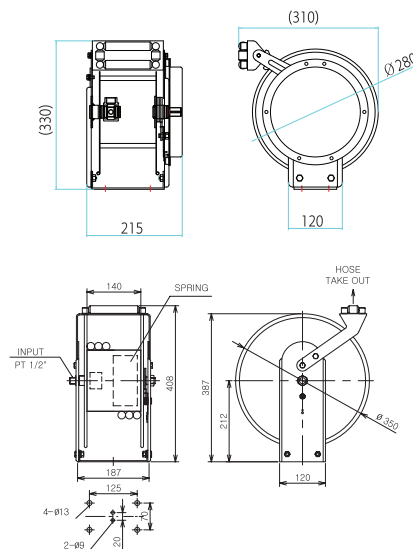

Model	Hose			W.P Max (kg/cm ²)	Weight (kg)	Usage
	Material	I.D-O.D(Ø)	L (M)			
WF-903	Synthetic Rubber	9	3	5	5	CleaCleaning Cold Water
WTF-1003STH	EPDM	10	3	10	5.5	Drinking/Cleaning Water
TWA-1308STH	Synthetic Rubber	13	8	5	11	Drinking/Cleaning(Hot) Less than 70°C
TWA-1308H-STHS	1 Wire Rubber	13	8	140	12	Cleaning(Hot) Less than 100°C
TSA-1308STH	EPDM	13	8	10	12	Drinking/Cleaning Less than 160°C
TWA-1312STH	Synthetic Rubber	13	12	5	15	Drinking/Cleaning(Hot) Less than 70°C
TWA-1312H-STHS	1 Wire Rubber	13	12	140	16	Cleaning(Hot) Less than 100°C
TSA-1312STH	EPDM	13	12	10	16	Drinking/Cleaning Less than 160°C


Water Hose Reel

Stainless Steel Reel for Kitchen/Restaurant

Built-out Spring TWA-STs Type



For Potable Cold Water
(Less than 70°C)

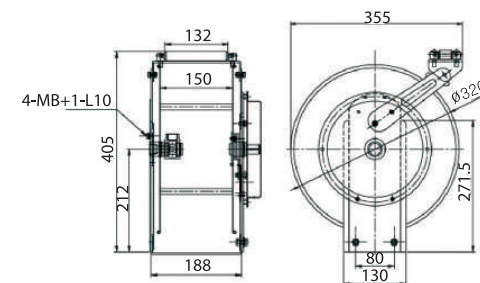

- Use : Food plants, Kitchens, and other clean scene
- Features : External spring, High tensile spring
- Installation : Fixed to wall or floor (Within 3M height, If installed over 4M, it could not rewind.)

Model	Hose			W.P Max (kg/cm ²)	Weight (kg)	Usage
	Material	I.D-O.D(Ø)	L (M)			
TWA-1310STS	Synthetic Rubber	13	10	5	14	Cleaning Cold Water
TWA-1315STS	Synthetic Rubber	13	15	5	15	Cleaning Cold Water
TWA-1310STH	Non-toxic PVC	13	10	5	14	Drinking/Cleaning(Hot) Less than 70°C
TWA-1315STH	Non-toxic PVC	13	15	5	15	Drinking/Cleaning(Hot) Less than 70°C


Built-out Spring TWA-STH Type



For Hot Water
(Less than 160°C)



For Hot Water
(Less than 100°C)

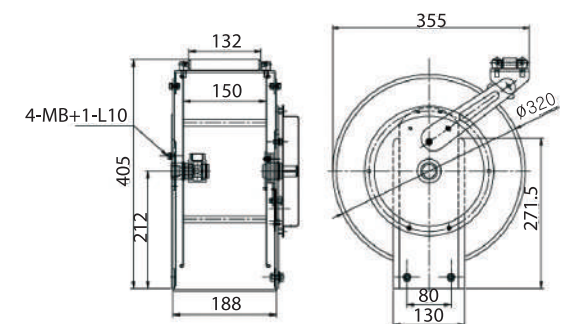

- Use : Food plants, Kitchens, and other clean scene
- Features : External spring, High tensile spring
- Installation : Fixed to wall or floor (Within 3M height, If installed over 4M, it could not rewind.)

Model	Hose			W.P Max (kg/cm ²)	Weight (kg)	Usage
	Material	I.D-O.D(Ø)	L (M)			
TSA-1310STH	EPDM	13	10	10	14	Drinking/Cleaning Less than 160°C
TSA-1315STH	EPDM	13	15	10	15	Drinking/Cleaning Less than 160°C
TWA-1310H-STHS	1 Wire Rubber	13	10	140	15	Cleaning(Hot) Less than 100°C
TWA-1315H-STHS	1 Wire Rubber	13	15	140	17	Cleaning(Hot) Less than 100°C


Water Hose Reel

Stainless Steel Reel for Kitchen/Restaurant

Nozzle



SWN-01

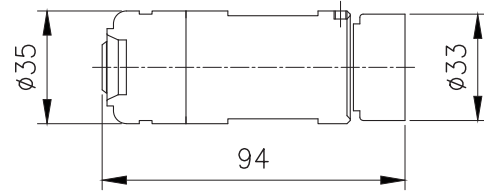

- Water injection system can be adjusted freely to the floor easier to clean.
- Brass alloy is available as a semi-permanent.
- NBR rubber coating material is resistant to impacts and heat.


Model	Material	Remark
SWN-01	Brass (NBR rubber coating)	Black

Water Hose Reel


Stainless Steel Reel for Kitchen/Restaurant

RWA-STs Type (Spring built-out Type)


- High pressure water hose reel.
- Stainless steel material.
- It can be serviced various applications such as high pressure water reel, cold & hot water reel...etc.
- Customized reel is available.

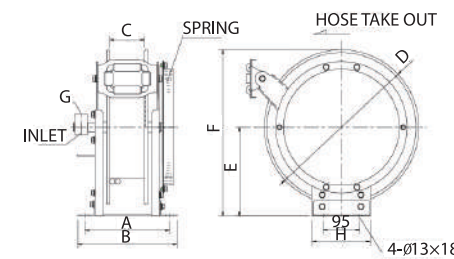


Installation components



Pivot Bracket (Optional)



Stainless Steel Ball Valve (Option)



Service Part

※ The floor fixed type is manufactured for the customer's requirement referring to working condition.

Model	Hose			W.P Max (kg/cm ²)	External Size								Remark
	Material	I.D (mm)	L (M)		A	B	C	D	E	F	G	H	
RWA-1320STS	Synthetic Rubber	13	20	5	278	318	150	450	260	485	PT1/2"	150	Housing built-out type
RWA-1325STS	Synthetic Rubber	13	25	5	278	318	150	500	290	540	PT1/2"	150	
RWA-1330STS	Synthetic Rubber	13	30	5	278	318	150	500	290	540	PT1/2"	150	
RWA-1340STS	Synthetic Rubber	13	40	5	338	378	210	500	290	540	PT1/2"	200	
RWA-1610STS	Synthetic Rubber	16	10	5	278	318	150	450	260	485	PT1/2"	150	
RWA-1615STS	Synthetic Rubber	16	15	5	278	318	150	450	260	485	PT1/2"	150	
RWA-1620STS	Synthetic Rubber	16	20	5	278	318	150	500	290	540	PT1/2"	150	
RWA-1625STS	Synthetic Rubber	16	25	5	338	378	210	500	290	540	PT1/2"	200	
RWA-1630STS	Synthetic Rubber	16	30	5	338	378	210	500	290	540	PT1/2"	200	
RWA-1640STS	Synthetic Rubber	16	40	5	338	378	210	550	315	590	PT1/2"	200	
RWA-1910STS	Synthetic Rubber	19	10	5	338	378	210	450	290	515	PT3/4"	200	Housing built-in type
RWA-1915STS	Synthetic Rubber	19	15	5	338	378	210	450	290	515	PT3/4"	200	
RWA-1920STS	Synthetic Rubber	19	20	5	338	378	210	500	290	540	PT3/4"	200	
RWA-1925STS	Synthetic Rubber	19	25	5	338	378	210	550	315	590	PT3/4"	200	
RWA-1930STS	Synthetic Rubber	19	30	5	338	378	210	550	315	590	PT3/4"	200	
RWA-2510STS	Synthetic Rubber	25	10	5	338	378	210	450	290	515	PT1"	200	
RWA-2515STS	Synthetic Rubber	25	15	5	338	378	210	500	315	565	PT1"	200	
RWA-2520STS	Synthetic Rubber	25	20	5	408	448	280	500	315	565	PT1"	200	
RWA-2525STS	Synthetic Rubber	25	25	5	408	448	280	550	345	620	PT1"	200	
RWA-2530STS	Synthetic Rubber	25	30	5	408	448	280	550	345	620	PT1"	200	

※ The above hoses are for cold water. The hose for hot water (Less 70°C or Less 100°C) is additional specifications.

Open Type_(Water Hose Reel)




It is selectable between an automatic and manual rewind typed water hose reel. According to use and function, it ranges from a corrosion resistance stainless hose reel to hose reel for food and beverage; and water reel for high pressure and for balcony. Reels for specially-equipped vehicles and fire engines are made by customer order.




SJ Type (Water Reel)

- Use : Construction site, industrial site, Laboratory
- Feature : Compact size, Automatic rewind, Single steel frame
- Installation : Wall, Ceiling

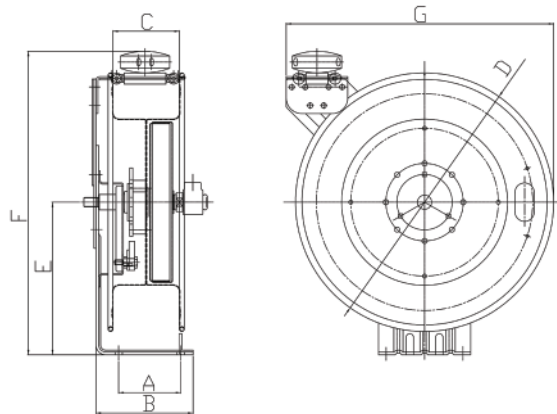

Model	Hose			W.P Max (kg/cm ²)	External Size							Weight (kg)
	Material	I,D (mm)	L (M)		A	B	C	D	E	F	G	
SRWA-910	Synthetic Rubber	9,5	10	20	101	158	105	Ø420	248	493	435	17
SRWA-915	Synthetic Rubber	9,5	15	20	101	158	105	Ø420	248	493	435	18
SRWA-920	Synthetic Rubber	9,5	20	20	101	158	110	Ø500	288	578	517	19
SRWA-1310	Synthetic Rubber	13	10	20	101	158	105	Ø420	248	493	435	18
SRWA-1315	Synthetic Rubber	13	15	20	101	158	105	Ø420	248	493	435	19
SRWA-1320	Synthetic Rubber	13	20	20	101	158	110	Ø500	288	578	517	24


Open Type_(Water Hose Reel)

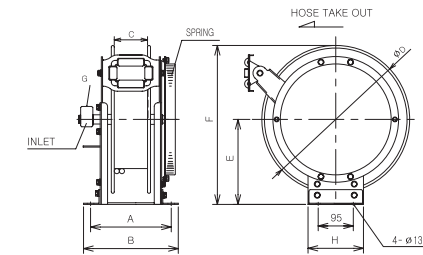

RWA-SK Type

- Use : Food factory, Construction site, Industrial site
- Features : Solid frame, Long-lasting sealing, Powerful spring
- Installation : Wall, Floor (Within 4M height, If installed over 4M, it could not rewind.)

Model	Hose			W.P Max (kg/cm ²)	External Size								Weight (kg)
	Material	I,D (mm)	L (M)		A	B	C	D	E	F	G	H	
RWA-1320	Synthetic Rubber	13	20	20	278	318	150	450	260	485	PT1/2"	150	27
RWA-1325	Synthetic Rubber	13	25	20	278	318	150	500	290	540	PT1/2"	150	30
RWA-1330	Synthetic Rubber	13	30	20	278	318	150	500	290	540	PT1/2"	150	32,4
RWA-1340	Synthetic Rubber	13	40	20	338	378	210	500	290	540	PT1/2"	200	40
RWA-1610	Synthetic Rubber	16	10	20	278	318	150	450	260	485	PT1/2"	150	26
RWA-1615	Synthetic Rubber	16	15	20	278	318	150	450	260	485	PT1/2"	150	29
RWA-1620	Synthetic Rubber	16	20	20	278	318	150	500	290	540	PT1/2"	150	32
RWA-1625	Synthetic Rubber	16	25	20	338	378	210	500	290	540	PT1/2"	200	36
RWA-1630	Synthetic Rubber	16	30	20	338	378	210	500	290	540	PT1/2"	200	40
RWA-1640	Synthetic Rubber	16	40	20	338	378	210	550	315	590	PT1/2"	200	45
RWA-1910	Synthetic Rubber	19	10	20	338	378	210	450	290	515	PT3/4"	200	28,7
RWA-1915	Synthetic Rubber	19	15	20	338	378	210	450	290	515	PT3/4"	200	34
RWA-1920	Synthetic Rubber	19	20	20	338	378	210	500	290	540	PT3/4"	200	38
RWA-1925	Synthetic Rubber	19	25	20	338	378	210	550	315	590	PT3/4"	200	42
RWA-1930	Synthetic Rubber	19	30	20	338	378	210	550	315	590	PT3/4"	200	45
RWA-2510	Synthetic Rubber	25	10	20	338	378	210	450	290	515	PT1"	200	35
RWA-2515	Synthetic Rubber	25	15	20	338	378	210	500	315	565	PT1"	200	38
RWA-2520	Synthetic Rubber	25	20	20	408	448	280	500	315	565	PT1"	200	43,6
RWA-2525	Synthetic Rubber	25	25	20	408	448	280	550	345	620	PT1"	200	48,6
RWA-2530	Synthetic Rubber	25	30	20	408	448	280	550	345	620	PT1"	200	50,5

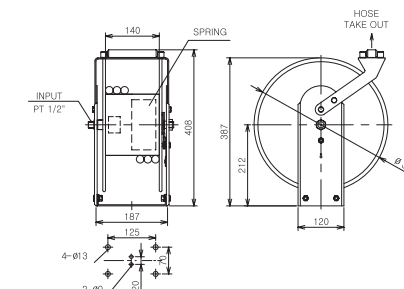


TWA-ST Type

- Use : Food factory, Kitchen, Other clean worksite
- Features : Built-in spring, Powder-blast painting (Steel), Fixed bracket
- Installation : Wall (Within 3M height, If installed over 4M, it could not rewind.)

Model	Hose			W.P Max (kg/cm ²)	Weight (kg)	Usage
	Material	I,D (mm)	L (M)			
TWA-1310ST	Synthetic Rubber	13	10	9	12	For Cleaning
TWA-1315ST	Synthetic Rubber	13	15	9	14	For Cleaning
TWA-1510ST	Nontoxic Hose For Kitchen	15	10	8	13	For Potable
TWA-1515ST	Nontoxic Hose For Kitchen	15	15	8	15	For Potable

Open Type_(Water Hose Reel)

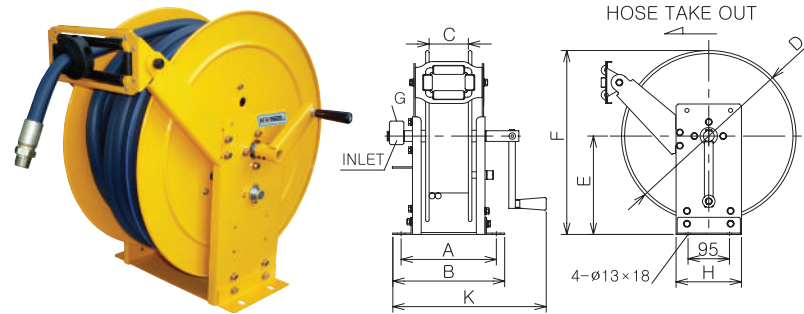

RWM-SK Type Manual Rewind

- Use : Food factory, Construction site, Industrial site
- Features : Solid frame, Manual rewind type
- Installation : Fixed to the floor


Model	Hose			W.P Max (kg/cm ²)	External Size									Weight (kg)
	Material	I,D (mm)	L (M)		A	B	C	D	E	F	G	H	K	
RWM-1320	Synthetic Rubber	13	20	20	278	318	150	450	260	485	PT1/2"	150	420	17
RWM-1330	Synthetic Rubber	13	30	20	278	318	150	500	290	540	PT1/2"	150	420	20,4
RWM-1340	Synthetic Rubber	13	40	20	338	378	210	500	290	540	PT1/2"	200	480	23
RWM-1350	Synthetic Rubber	13	50	20	338	378	210	500	290	540	PT1/2"	200	480	27
RWM-1615	Synthetic Rubber	16	15	20	278	318	150	450	260	485	PT1/2"	150	480	19
RWM-1620	Synthetic Rubber	16	20	20	278	318	150	500	290	540	PT1/2"	150	420	20
RWM-1625	Synthetic Rubber	16	25	20	338	378	210	500	290	540	PT1/2"	200	420	20
RWM-1630	Synthetic Rubber	16	30	20	338	378	210	500	290	540	PT1/2"	200	480	25,2
RWM-1640	Synthetic Rubber	16	40	20	338	378	210	550	315	590	PT1/2"	200	480	32
RWM-1650	Synthetic Rubber	16	50	20	408	448	280	550	345	620	PT1/2"	200	550	40
RWM-1915	Synthetic Rubber	19	15	20	338	378	210	450	290	515	PT3/4"	200	480	26
RWM-1920	Synthetic Rubber	19	20	20	338	378	210	500	290	540	PT3/4"	200	480	26
RWM-1930	Synthetic Rubber	19	30	20	338	378	210	550	315	590	PT3/4"	200	480	34
RWM-1940	Synthetic Rubber	19	40	20	408	448	280	550	345	620	PT3/4"	200	550	41
RWM-2515	Synthetic Rubber	25	15	20	338	378	210	500	315	565	PT1"	200	480	30
RWM-2520	Synthetic Rubber	25	20	20	408	448	280	500	315	565	PT1"	200	550	30
RWM-2530	Synthetic Rubber	25	30	20	408	448	280	550	345	620	PT1"	200	550	36

Cable Reel

PER / EER


ALE-SK . ALM-SK

PER Type(Material : ABS plastic case)



- Use : All sorts of electrical work places(Service center, Factories, Laboratory)
- Features : Steel package type, Hanger bracket included
- Installation : Wall, Ceiling(Within 3M height, If installed over 4M, it could not rewind.)

Model	Cable			Maximum Capacity Max (V×A)	External Size (mm)			Weight (kg)
	Material	I,D—O,D(Ø)	L (M)		A	B	C	
PER-110	VCTF	1,5SQ×3C	10	220V-10A	440	177	360	9,8
PER-115	VCTF	1,5SQ×3C	15	220V-10A	440	177	360	10,1
PER-120	VCTF	1,5SQ×3C	20	220V-10A	505	177	421	11,2
PER-130	VCTF	1,5SQ×3C	27	220V-10A	505	177	421	12,1
PER-210	VCTF	2,5SQ×3C	10	220V-15A	440	177	360	10,3
PER-215	VCTF	2,5SQ×3C	15	220V-15A	440	177	360	10,8
PER-220	VCTF	2,5SQ×3C	20	220V-15A	505	177	421	12,2
PER-230	VCTF	2,5SQ×3C	27	220V-15A	505	177	421	13,5

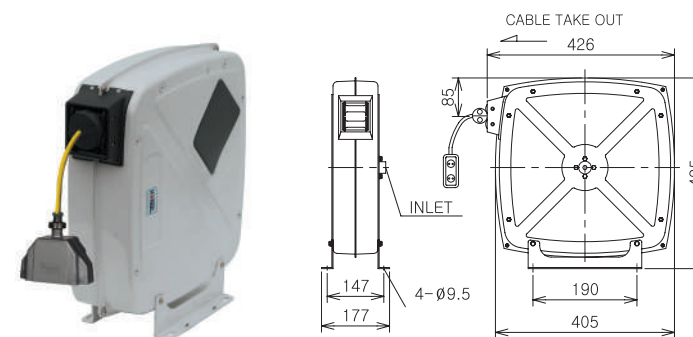


EER Type(Material : Steel case)

- Use : All sorts of electrical work places(Service center, Factories, Laboratory)
- Features : Steel package type, Hanger bracket included
- Installation : Wall, Ceiling(Within 3M height, If installed over 4M, it could not rewind.)

Model	Cable		Maximum Capacity Max (V×A)	Weight (kg)	Remark
	Cable Specifications	L (M)			
EER-110	VCTF-1,5 SQ×3C, Outlet	10	220V×10A	12	For Indoor
EER-115	VCTF-1,5 SQ×3C, Outlet	15	220V×10A	12	For Indoor
EER-120	VCTF-1,5 SQ×3C, Outlet	20	220V×10A	14	For Indoor
EER-210	VCTF-2,5 SQ×3C, Outlet	10	220V×15A	12	For Indoor
EER-215	VCTF-2,5 SQ×3C, Outlet	15	220V×15A	14	For Indoor
EER-110L	VCTF-1,5 SQ×3C, Halogen Light	10	220V×10A	12	For Indoor
EER-115L	VCTF-1,5 SQ×3C, Halogen Light	15	220V×10A	12	For Indoor
EER-120L	VCTF-1,5 SQ×3C, Halogen Light	20	220V×10A	14	For Indoor

Open Type (Cable Reel)


Cable Reel

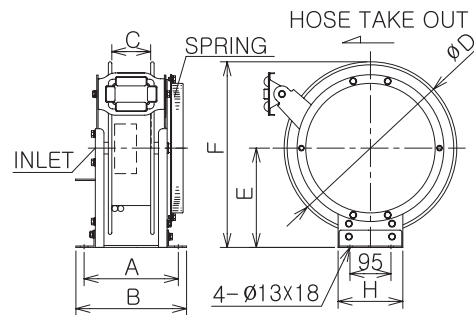

ALE-SK Type

- Use : Operation cable for industrial site, For power supply
- Features : Solid frame, High durable slip ring, Manual rewind
- Installation : Wall, Floor (Within 4M height, If installed over 4M, it could not rewind.)

Model	Cable		Maximum Capacity Max (V×A)	External Size							Weight (kg)	Remark
	Cable Specifications	L (M)		A	B	C	D	E	F	G		
ALE-415-3	VCTF-4.0 SQ×3C	15	380V×15A	238	278	110	400	230	430	150	25,6	For Indoor
ALE-420-3	VCTF-4.0 SQ×3C	20	380V×15A	238	278	110	400	230	430	150	28,6	For Indoor
ALE-425-3	VCTF-4.0 SQ×3C	25	380V×15A	238	278	110	450	260	485	150	32	For Indoor
ALE-430-3	VCTF-4.0 SQ×3C	30	380V×15A	238	278	110	450	260	485	150	36	For Indoor
ALE-615-3	VCTF-6.0 SQ×3C	15	380V×30A	238	278	110	400	230	430	150	27	For Indoor
ALE-620-3	VCTF-6.0 SQ×3C	20	380V×30A	238	278	110	450	260	485	150	30	For Indoor
ALE-625-3	VCTF-6.0 SQ×3C	25	380V×30A	238	278	110	500	290	540	200	33,5	For Indoor
ALE-630-3	VCTF-6.0 SQ×3C	30	380V×30A	278	318	150	500	290	540	200	37	For Indoor
ALE-1015-3	VCTF-10 SQ×3C	15	380V×40A	278	318	150	400	230	430	150	32	For Indoor
ALE-1020-3	VCTF-10 SQ×3C	20	380V×40A	278	318	150	450	260	485	150	37	For Indoor
ALE-1025-3	VCTF-10 SQ×3C	25	380V×40A	278	318	150	500	290	540	200	42	For Indoor
ALE-1030-3	VCTF-10 SQ×3C	30	380V×40A	278	318	150	500	290	540	200	46	For Indoor

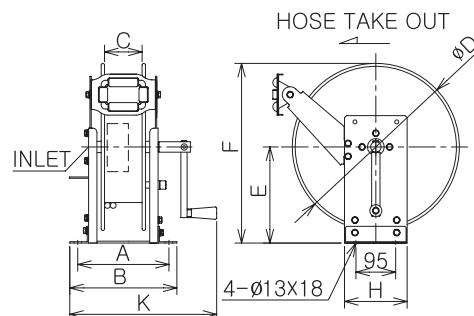

ALM-SK Type Manual Rewind

- Use : Operation cable for industrial site, For power supply
- Features : Solid frame, High durable slip ring, Manual rewind
- Installation : Wall, Floor (Within 4M height, If installed over 4M, it could not rewind.)

Model	Cable		Maximum Capacity Max (V×A)	External Size								Weight (kg)	Remark
	Cable Specifications	L (M)		A	B	C	D	E	F	H	K		
ALM-420-3	VCTF-4,0 SQ×3C	20	380V×15A	238	278	110	400	230	430	150	380	16,6	For Indoor
ALM-430-3	VCTF-4,0 SQ×3C	30	380V×15A	238	278	110	450	260	485	150	380	21,5	For Indoor
ALM-440-3	VCTF-4,0 SQ×3C	40	380V×15A	238	278	110	450	260	485	200	380	24,5	For Indoor
ALM-450-3	VCTF-4,0 SQ×3C	50	380V×15A	278	318	150	450	260	485	200	420	29,5	For Indoor
ALM-620-3	VCTF-6,0 SQ×3C	20	380V×30A	238	278	110	450	260	485	150	380	21	For Indoor
ALM-630-3	VCTF-6,0 SQ×3C	30	380V×30A	278	318	150	500	290	540	200	420	23	For Indoor
ALM-640-3	VCTF-6,0 SQ×3C	40	380V×30A	278	318	150	450	260	485	200	420	27,5	For Indoor
ALM-650-3	VCTF-6,0 SQ×3C	50	380V×30A	278	318	150	500	290	540	200	420	32,4	For Indoor
ALM-1020-3	VCTF-10 SQ×3C	20	380V×40A	278	318	150	450	260	485	150	420	27	For Indoor
ALM-1030-3	VCTF-10 SQ×3C	30	380V×40A	278	318	150	500	290	540	200	420	32	For Indoor
ALM-1040-3	VCTF-10 SQ×3C	40	380V×40A	338	378	210	450	260	485	200	480	36	For Indoor
ALM-1050-3	VCTF-10 SQ×3C	50	380V×40A	338	378	210	450	260	485	200	480	40	For Indoor


Oil, Grease & High Pressure Hose Reel

EOR /EGR / SJ

RHA / RHA-G

- It is usually used for the supply lines of high pressed grease and all sorts of lubricating oil.
- It is well-designed so that oil may not leak or change rolling capacity by employing high pressed rubber hose and special spring even if it is used for long time. And it is user friendly equipment made as simply as possible.
- It heightens work efficiency and keeps work places tidy.


It is usually used for the supply lines of high pressed grease and all sorts of lubricating oil. Structured with a high pressed rubber hose and a special spring in a sealed case made of steel, it is not only strong but also its appearance looks neat. It is well-designed so that oil may not leak or change rolling capacity even if it is used for long time. And it is user friendly equipment made as simply as possible. It heightens work efficiency and keeps work places tidy.

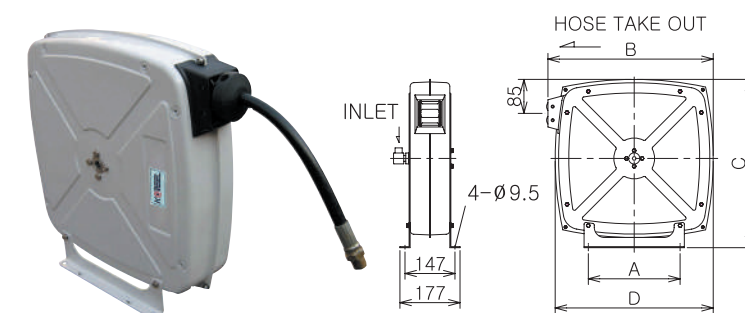

EOR Type (Material : Steel case)

- Use : Car service center, Petrol station, Oil depots of industrial sites
- Features : Compact appearance, Free installation
- Installation : Wall, Ceiling (Within 4M height, If installed over 4M, it could not rewind.)

Model	Hose			W,P Max (kg/cm ²)	External Size				Weight (kg)
	Size	I,D (mm)	L (M)		A	B	C	D	
EOR-610	1/4" ×1W	6,4	10	60	270	486	495	465	16
EOR-910	3/8" ×1W	9,0	10	60	270	486	495	465	19,5
EOR-1310	1/2" ×1W	13	10	60	270	486	495	465	22

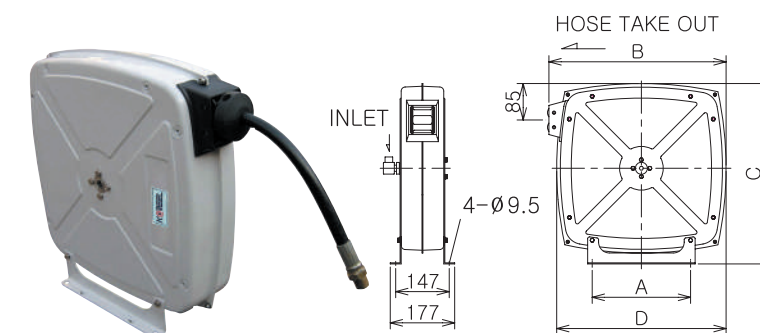

EGR Type (Material : Steel case)

- Use : Large-sized car service center, Manufacturing and repairing heavy machinery, Grease supply lines of steel mills
- Features : Compact appearance, Free installation
- Installation : Wall, Ceiling (Within 4M height, If installed over 4M, it could not rewind.)

Model	Hose			W,P Max (kg/cm ²)	External Size				Weight (kg)
	Size	I,D (mm)	L (M)		A	B	C	D	
EGR-610	1/4" ×2W	6,4	10	280	270	486	495	465	16
EGR-615	1/4" ×2W	6,4	15	280	270	486	495	465	18
EGR-910	3/8" ×2W	6,4	10	280	270	486	495	465	19,5

Sorts of Bracket



(SW) Left and right swing type
(option)



(F) Wall-fixed type
(basic)




(T) Ceiling-fixed type
(option)

Open Type_(oil, Grease & High Pressure Hose Reel)




SJ Type (Oil Reel)

- Use : Construction site, industrial site, Laboratory
- Feature : Compact size, Automatic rewind, Single steel frame
- Installation : Wall, Ceiling

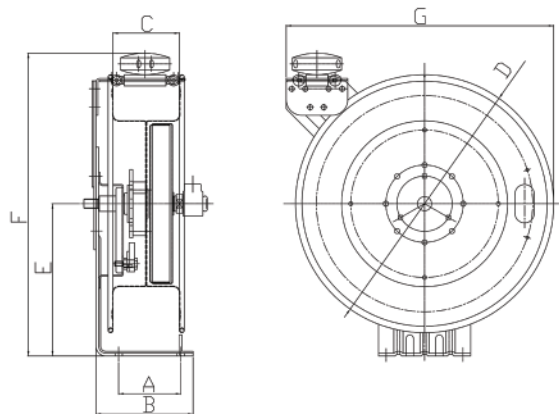

Model	Material	Hose		W.P Max (kg/cm ²)	External Size							Weight (kg)
		I.D (mm)	L (M)		A	B	C	D	E	F	G	
SRHA-610G	1/4" X 2W	6.4	10	350	101	158	105	Ø420	248	493	435	19
SRHA-615G	1/4" X 2W	6.4	15	350	101	158	105	Ø420	248	493	435	21
SRHA-620G	1/4" X 2W	6.4	20	350	101	158	105	Ø500	288	578	517	23
SRHA-910	3/8" X 1W	9.5	10	158	101	158	105	Ø420	248	493	435	19
SRHA-915	3/8" X 1W	9.5	15	158	101	158	105	Ø420	248	493	435	20
SRHA-920	3/8" X 1W	9.5	20	158	101	158	110	Ø500	288	578	517	25


Open Type_(oil, Grease & High Pressure Hose Reel)

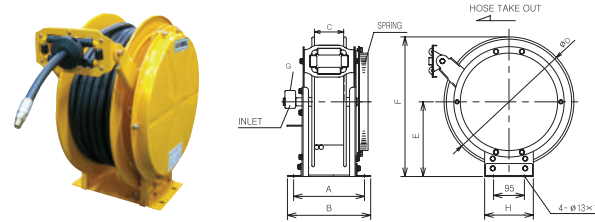

RHA Type

- Use : Car service center, Industrial site, Steel mills, Oil depots of power plants
- Features : Solid frame, High durability seals, Powerful spring
- Installation : Wall, Floor (Within 4M height, If installed over 4M, it could not rewind.)

Model	Hose			W.P Max (kg/cm ²)	External Size								Weight (kg)
	Size	I,D (mm)	L (M)		A	B	C	D	E	F	G	H	
RHA-610	1/4" X1W	6.4	10	190	216	256	90	400	230	430	PT1/4"	150	16.5
RHA-615	1/4" X1W	6.4	15	190	216	256	90	400	230	430	PT1/4"	150	19
RHA-620	1/4" X1W	6.4	20	190	236	276	110	400	230	430	PT1/4"	150	21.3
RHA-625	1/4" X1W	6.4	25	190	236	276	110	450	260	485	PT1/4"	150	25.8
RHA-630	1/4" X1W	6.4	30	190	236	276	110	450	260	485	PT1/4"	150	28
RHA-910	3/8" X1W	9.5	10	150	216	256	90	400	230	430	PT3/8"	150	22
RHA-915	3/8" X1W	9.5	15	150	236	276	110	400	230	430	PT3/8"	150	24
RHA-920	3/8" X1W	9.5	20	150	236	276	110	450	260	485	PT3/8"	150	27
RHA-925	3/8" X1W	9.5	25	150	278	318	150	500	290	540	PT3/8"	200	31.5
RHA-930	3/8" X1W	9.5	30	150	278	318	150	500	290	540	PT3/8"	200	35
RHA-1310	1/2" X1W	12.5	10	140	278	318	150	400	230	430	PT1/2"	150	24
RHA-1315	1/2" X1W	12.5	15	140	278	318	150	400	230	430	PT1/2"	150	26
RHA-1320	1/2" X1W	12.5	20	140	278	318	150	450	260	485	PT1/2"	150	32
RHA-1325	1/2" X1W	12.5	25	140	278	318	150	500	290	540	PT1/2"	200	36
RHA-1330	1/2" X1W	12.5	30	140	278	318	150	500	290	540	PT1/2"	200	38
RHA-1910	3/4" X1W	19	10	80	338	378	210	450	290	515	PT3/4"	200	34
RHA-1915	3/4" X1W	19	15	80	338	378	210	450	290	515	PT3/4"	200	37
RHA-1920	3/4" X1W	19	20	80	338	378	210	500	290	540	PT3/4"	200	40
RHA-1925	3/4" X1W	19	25	80	338	378	210	550	315	590	PT3/4"	200	45
RHA-1930	3/4" X1W	19	30	80	338	378	210	550	315	590	PT3/4"	200	48
RHA-2510	1" X1W	25	10	70	338	378	210	450	290	515	PT1"	200	36
RHA-2515	1" X1W	25	15	70	408	448	280	500	315	565	PT1"	200	39
RHA-2520	1" X1W	25	20	70	408	448	280	500	315	565	PT1"	200	44
RHA-2525	1" X1W	25	20	70	408	448	280	550	345	620	PT1"	200	44

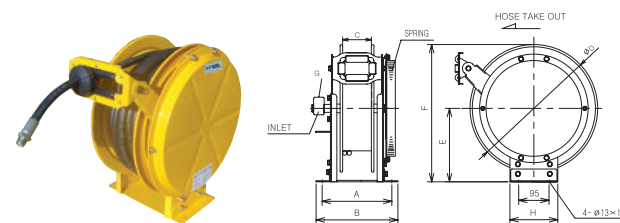

RHA-G Type

- Use : Large-sized car service center, Manufacturing heavy machinery, Grease supply lines of steel mills
- Features : Solid frame, High durability seals, Powerful spring
- Installation : Wall, Floor (Within 4M height, If installed over 4M, it could not rewind.)

Model	Hose			W.P Max (kg/cm ²)	External Size								Weight (kg)
	Size	I,D (mm)	L (M)		A	B	C	D	E	F	G	H	
RHA-610G	1/4" X2W	6.4	10	350	216	256	90	400	230	430	PT1/4"	150	16.5
RHA-615G	1/4" X2W	6.4	15	350	216	256	90	400	230	430	PT1/4"	150	19
RHA-620G	1/4" X2W	6.4	20	350	236	276	110	400	230	430	PT1/4"	150	21.3
RHA-625G	1/4" X2W	6.4	25	350	236	276	110	450	260	485	PT1/4"	150	25.8
RHA-630G	1/4" X2W	6.4	30	350	236	276	110	450	290	515	PT1/4"	200	28
RHA-910G	3/8" X2W	9.5	10	280	216	256	90	400	230	430	PT3/8"	150	27
RHA-915G	3/8" X2W	9.5	15	280	236	276	110	450	260	485	PT3/8"	150	29
RHA-920G	3/8" X2W	9.5	20	280	236	276	110	450	260	485	PT3/8"	150	33
RHA-925G	3/8" X2W	9.5	25	280	278	318	150	500	290	540	PT3/8"	200	38
RHA-930G	3/8" X2W	9.5	30	280	278	318	150	500	290	540	PT3/8"	200	43

Oil & Grease Hose Reel



Twin pedestal reel(Compact size)

RHAT range of steel reels




Reference Drawing	Model No	Specification	
		W.P(PSI)	Hose specification
	RHAT-915G	4000 psi	2wire rubber hose id 3/8" x 15m for Grease use
	RHAT-1315	2000 psi	1wire rubber hose id 1/2" x 15m for diesel use
	RHAT-1915	1250 psi	1wire rubber hose id 3/4" x 15m for diesel use
	RHAT-2515	1000 psi	1wire rubber hose id 1" x 15m for diesel use
	RHAT-3815	35 bar (500 psi)	1wire rubber hose id 1*1/2" x 15m for diesel use

Gas Hose Reel

RGCA / RGCF

RGA-SK / RGM-SK

Gas hose Reel helps to handle the oxygen and LPG(or acetylene gas) containers safely at work sites and prevent negligent accidents. It is designed to load any gas containers on the carriage so as not to fall down. There is no gas leakage either at maximum pressure(15kg/cm²) or at minimum pressure and then its safety is guaranteed. It can be organized simply.

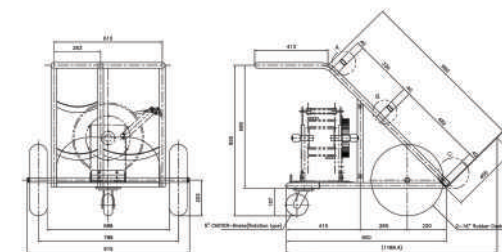


Utility model patent No.0164156
Technologically certified product

RGCA Type

Model	Carriage Specifications		Gas Hose Specifications				Rewind Method	Remark
	Pipe Specifications	Wheel Specification	Inner / Outer Diameter (mm)	L (M)	W.P Max (kg/cm ²)	Material		
RGCA-820	Ø32×1.4t	16" Air & 6" Rotation	Ø8×Ø16	20	10	Rubber	Automatic Rewind	
RGCA-825	Ø32×1.4t	16" Air & 6" Rotation	Ø8×Ø16	25	10	Rubber	Automatic Rewind	
RGCA-830	Ø32×1.4t	16" Air & 6" Rotation	Ø8×Ø16	30	10	Rubber	Automatic Rewind	

Gas Hose Reel

Gas Hose Reel

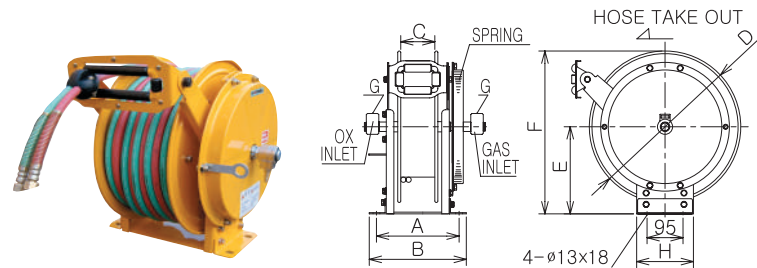

RGA-SK Type

- Use : Gas welding, Cutting
- Features : Solid frame, Built-out spring
- Installation : Wall, Floor (Within 3M height, If installed over 4M, it could not rewind.)

Model	Hose			W.P Max (kg/cm²)	External Size								Weight (kg)
	Material	I.D (mm)	L (M)		A	B	C	D	E	F	G	H	
RGA-620	Rubber Hose	6	20	10	238	278	110	400	230	430	PT1/4"	150	24
RGA-625	Rubber Hose	6	25	10	238	278	110	450	260	485	PT1/4"	150	29
RGA-630	Rubber Hose	6	30	10	278	318	150	450	260	485	PT1/4"	150	32
RGA-815	Rubber Hose	8	15	10	278	318	150	400	230	430	PT1/4"	150	24,7
RGA-820	Rubber Hose	8	20	10	278	318	150	450	260	485	PT1/4"	150	28
RGA-825	Rubber Hose	8	25	10	278	318	150	500	290	540	PT1/4"	150	33
RGA-830	Rubber Hose	8	30	10	278	318	150	500	290	540	PT1/4"	150	36


Exhaust Hose Reel

Exhaust Hose Rail System & Accessories

It is a necessary item to keep work place of car service center clean and comfortable. It functions to inhale hot exhaust gas and then fume out through a connected pipe. It is the economical product which is quite adequate for small-sized work places.

WGS Type Spring rewind excluding blower




- Use : Small-sized car service center, Laboratory, School labs
- Features : Spring rewind, Flexible high-temperature hose
- Installation : Wall, Ceiling (Within 4M height, If installed over 4M, it could not rewind.)

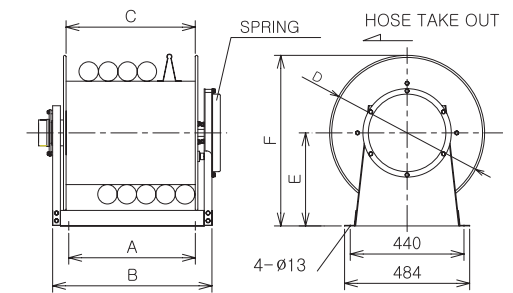

Model	Hose			External Size						Weight (kg)
	I.D (mm)	Maximum Temperature	L (M)	A	B	C	D	E	F	
WGS-7507	75	180 °	7,5	590	720	600	600	360	660	48
WGS-7510	75	180 °	10	740	870	750	600	360	660	53,5
WGS-1007	100	180 °	7,5	640	770	650	650	400	725	54
WGS-1010	100	180 °	10	790	920	800	650	400	725	60

WGS-B Type Spring rewind including blower

- Use : Small-sized car service center, Laboratory, School labs
- Features : Spring rewind, Blower-attached type, Flexible high-temperature hose
- Installation : Wall, Ceiling (Within 4M height, If installed over 4M, it could not rewind.)

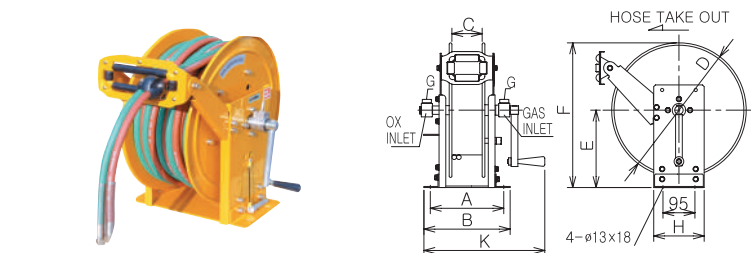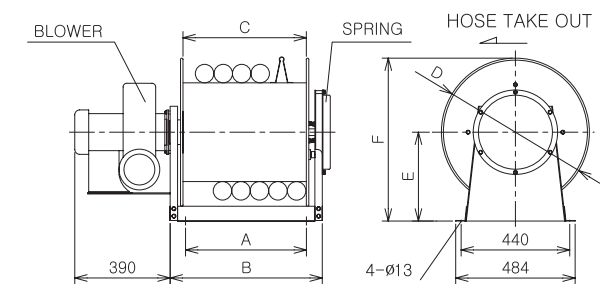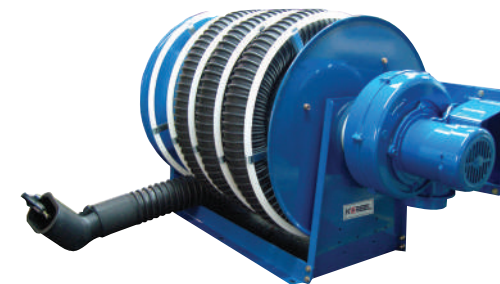

RGM-SK Type Manual Rewind

- Use : Gas welding, Cutting
- Features : Solid stand frame, Manual rewind
- Installation : Fixed to the floor

Model	Hose			W.P Max (kg/cm ²)	External Size									Weight (kg)
	Material	I.D (mm)	L (M)		A	B	C	D	E	F	G	H	K	
RGM-620	Rubber Hose	6	20	10	238	278	110	400	230	430	PT1/4"	150	380	20
RGM-630	Rubber Hose	6	30	10	278	318	150	450	260	485	PT1/4"	150	420	23
RGM-640	Rubber Hose	6	40	10	278	318	150	500	290	540	PT1/4"	150	420	25
RGM-650	Rubber Hose	6	50	10	338	378	210	450	260	485	PT1/4"	150	480	32
RGM-820	Rubber Hose	8	20	10	278	318	150	450	260	485	PT1/4"	150	420	21,3
RGM-830	Rubber Hose	8	30	10	278	318	150	500	290	540	PT1/4"	150	420	27,8
RGM-840	Rubber Hose	8	40	10	338	378	210	500	290	540	PT1/4"	150	480	33
RGM-850	Rubber Hose	8	50	10	338	378	210	550	315	590	PT1/4"	200	480	39

Model	Hose			External Size						Weight (kg)
	I.D (mm)	Maximum Temperature	L (M)	A	B	C	D	E	F	
WGS-7507B	75	180 °	7,5	590	720	600	600	360	660	48
WGS-7510B	75	180 °	10	740	870	750	600	360	660	53,5
WGS-1007B	100	180 °	7,5	640	770	650	650	400	725	54
WGS-1010B	100	180 °	10	790	920	800	650	400	725	60

Exhaust Hose Reel


Exhaust Hose Rail System & Accessories

It is a necessary item to keep a work place of a car service center clean and comfortable. It functions to inhale hot exhaust gas and then fume out through a connected pipe. As an electric motor driven type, adopting an integrated control circuit with powerful motor drive, it is easy to maintain and repair. In addition, a multipurpose muffler nozzle is attached.

WGM Type

Motor driven type (Excluding blower)

- Use : Small-sized car service center, Laboratory, School labs
- Features : Spring rewind, Blower-attached type, Flexible high-temperature hose
- Installation : Wall, Ceiling (Within 4M height, If installed over 4M, it could not rewind.)

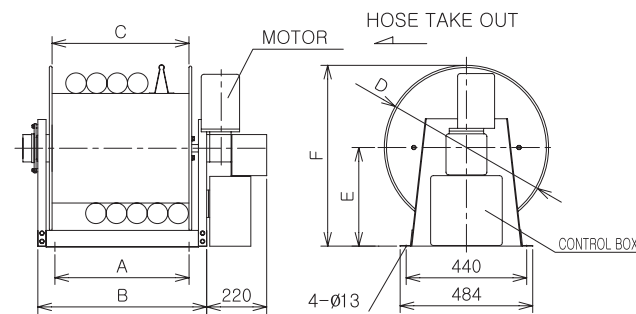


Model	Hose			External Size						Weight (kg)	Voltage
	I,D (mm)	Maximum Temperature	L (M)	A	B	C	D	E	F		
WGM-7507	75	180 °	7.5	590	720	600	600	360	660	52	Three Phases 220V/ 380V
WGM-7510	75	180 °	10	740	870	750	600	360	660	58	Three Phases 220V/ 380V
WGM-1007	100	180 °	7.5	640	770	650	650	400	725	73.5	Three Phases 220V/ 380V
WGM-1010	100	180 °	10	790	920	800	650	400	725	81	Three Phases 220V/ 380V

WGM-B Type

Motor driven type (Including blower)

- Use : Car service center, Automobile Laboratory, School labs
- Features : Automatic motor driven type, Blower, Flexible high-temperature hose
- Installation : Wall, Ceiling (Within 4M height, If installed over 4M, it could not rewind.)

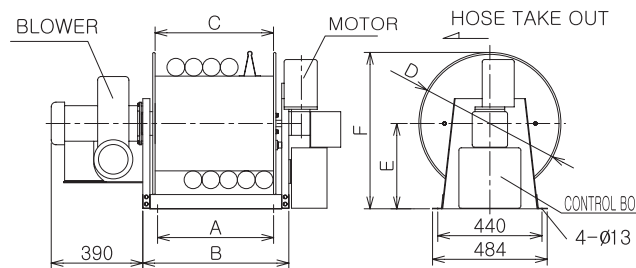

Model	Hose			External Size						Weight (kg)	Voltage
	I,D (mm)	Maximum Temperature	L (M)	A	B	C	D	E	F		
WGM-7507B	75	180 °	7.5	590	720	600	600	360	660	55	Three Phases 220V/ 380V
WGM-7510B	75	180 °	10	740	870	750	600	360	660	61	Three Phases 220V/ 380V
WGM-1007B	100	180 °	7.5	640	770	650	650	400	725	76.5	Three Phases 220V/ 380V
WGM-1010B	100	180 °	10	790	920	800	650	400	725	84	Three Phases 220V/ 380V

※ A Remote control is optional.

Exhaust Hose Reel

Exhaust Hose Rail System & Accessories

Exhaust Hose Rail system has strengths in its flexible use and high efficiency comparing to other fixed exhaust hose reels. Equipping electrical or manual hose reel as much as needed on a linear-typed rail, you can handle it quite freely even while moving. Rail duct fumes out exhaust gas to outdoor and sliding rail braid consists of high-temperature rubber braid so there is no leakage. Electrical exhaust host reel functions optimally as the current collector of power and control are installed in it.

Rail Type

- Use : Auto factories, Service Center, Laboratory, School labs
- Features : Frame by each 5M, Electrical type, Manual Type
- Installation : Ceiling (Within 5M height, If installed over 4M, it could not rewind.)

Model	Rail			Remark
	I,D (mm)	Maximum Temperature	Basic Length	
EHR-500	75	180 °	5M	Non-Power Type
EHR-500P	100	180 °	5M	Electrical Type

High-temperature Exhaust Hose

- It has excellent flexibility as using natural materials and can inhale hot exhaust gas.
- Flection radius is small so it is easy to rewind and use.
- It is divided into 2 kinds, depending on the temperature and situation in use.



- Use : Auto factory, Service Center, Laboratory, School labs
- Features : Frame by each 5M, Electrical type, Manual Type
- Installation : Ceiling (Within 5M height, If installed over 4M, it could not rewind.)

Model	Hose			Weight (kg)	Remark
	I,D (mm)	Maximum Temperature	L (M)		
CR-MP75	75	180 °	1m	—	Circular Type
CR-MP100	100	180 °	1m	—	Circular Type
CR-MP125	125	180 °	1m	—	Circular Type
CR-HP75	75	180 °	1m	—	Oval Type
CR-HP100	100	180 °	1m	—	Oval Type
CR-HP125	125	180 °	1m	—	Oval Type

Y Branch Hose

In case of a dual muffler car, detachable Y Branch hose can be used by being employed to a single hose reel nozzle. It is very easy to keep after use.



Model	Hose			Weight (kg)	Remark
	I,D (mm)	Maximum Temperature	L (M)		
YBC-021	75	180 °	1m+1m	—	Circular Nozzle
YBC-02	75	180 °	1m+1m	—	Oval Nozzle
BHC-7502	75	180 °	1m+1m	—	Circular Nozzle
BHC-1002	100	180 °	1m+1m	—	Circular Nozzle
BHC-12502	125	180 °	1m+1m	—	Circular Nozzle

Exhaust reel nozzle

Exhaust reel nozzle

Oval type-Large, Small / Circular type-Large, Small(Heat-resistant rubber)



Other accessory


QM-5(Implantable socket in bumper)



Spring Balancer




Supplementary equipment to reduce the weight of work tools.

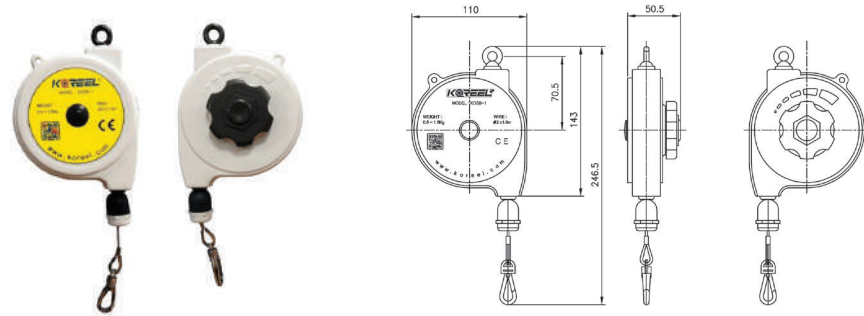


KOSB-1

Model	Range Of Application (kg)	Wire		Weight (kg)	Packing
		External Diameter (Ø)	L (M)		
KOSB-1	0,5~1,5	2mm Coated Wire	1,8	0,45	1Box X 1EA

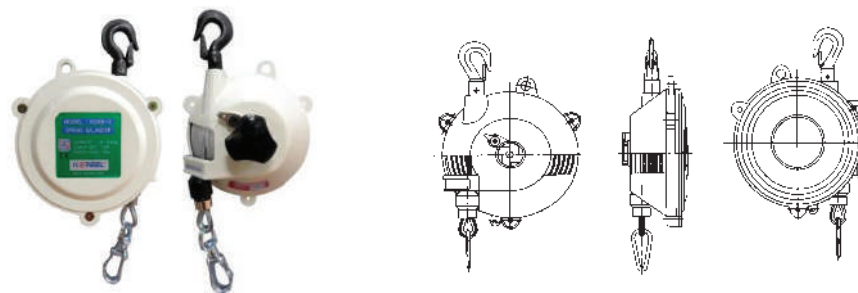

KOSB-3,5


Model	Range Of Application (kg)	Wire		Weight (kg)	Packing
		External Diameter (Ø)	L (M)		
KOSB-3	1,0 ~ 3,0	3mm Coated Wire	1,8	1,55	1Box X 1EA
KOSB-5	3,0 ~ 5,0	3mm Coated Wire	1,8	1,65	1Box X 1EA

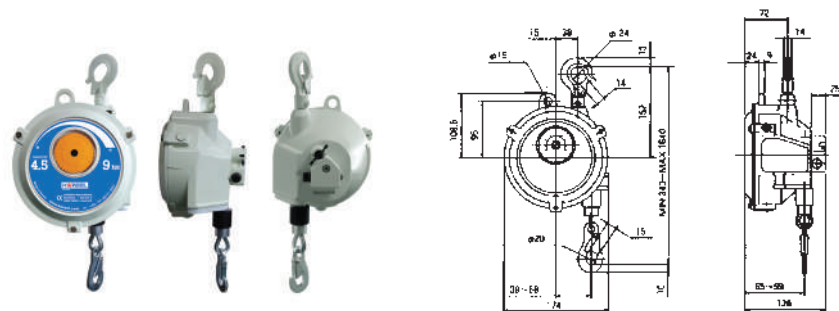

KOSB-9, 15


Model	Range Of Application (kg)	Wire		Weight (kg)	Packing
		External Diameter (Ø)	L (M)		
KOSB-9	4,5~9,0	4mm Coated Wire	1,3	3,7	1Box X 1EA
KOSB-15	9,0~15,0	4mm Coated Wire	1,3	3,8	1Box X 1EA

Spring Balancer

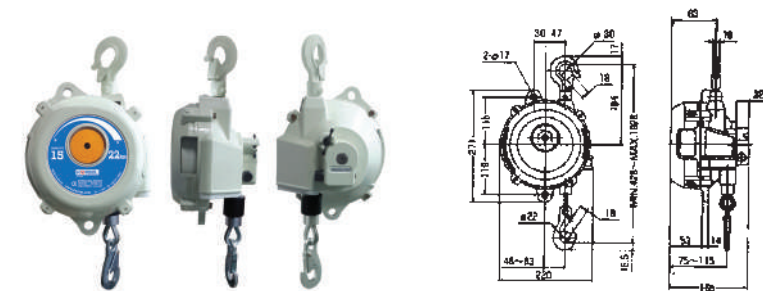


KOSB-22, 30

Model	Range Of Application (kg)	Wire		Weight (kg)	Packing
		External Diameter (Ø)	L (M)		
KOSB-22	15,0~22,0	4,8mm Coated Wire	1,8	7,7	1Box X 1EA
KOSB-30	22,0~30,0	4,8mm Coated Wire	1,8	8,0	1Box X 1EA

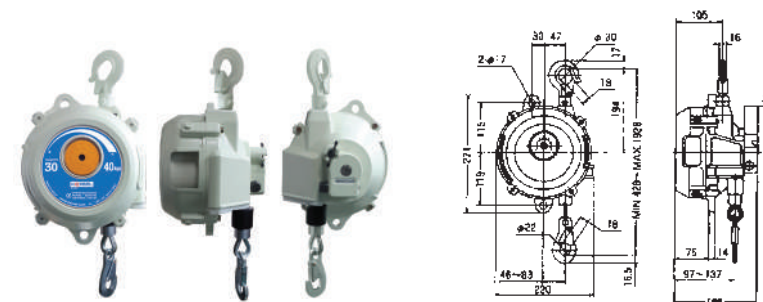

KOSB-40, 50

Model	Range Of Application (kg)	Wire		Weight (kg)	Packing
		External Diameter (Ø)	L (M)		
KOSB-40	30,0~40,0	4,8mm Coated Wire	1,8	9,8	1Box X 1EA
KOSB-50	40,0~50,0	4,8	1,8	10,4	1Box X 1EA

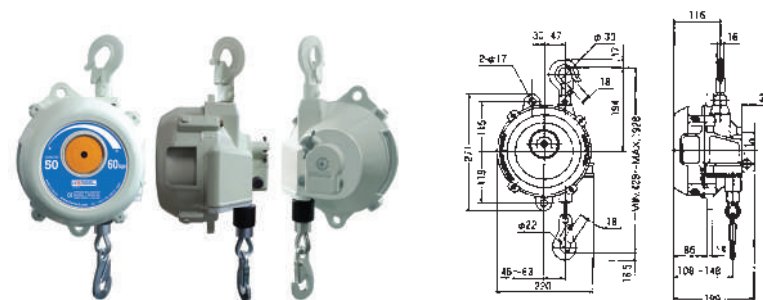

KOSB-60, 70, 80

Model	Range Of Application (kg)	Wire		Weight (kg)	Packing
		External Diameter (Ø)	L (M)		
KOSB-60	50,0~60,0	4,8mm Coated Wire	1,8	11	1Box X 1EA
KOSB-70	60,0~70,0	4,8mm Coated Wire	1,8	11,5	1Box X 1EA
KOSB-80	70,0~80,0	4,8mm Coated Wire	1,8	12	1Box X 1EA

Spring Balancers (Notice in use)

- Do not dissemble it carelessly. If the spring inside may bounce up when dissembling, there is a risk of injury.
- When you adjust the spring tension, hold spring and hexagonal wrench tightly then turn it. Otherwise, hexagonal wrench can cause the injury.
- Rechet stopper must be fixed tightly without failure.
- When a spring balancer keeps swinging(especially inside of a ship), do fix it using fitting holes bolts.

Air Tube & Hose

 Polyurethane, Polyethylene, Nylon Tube



Polyurethane Tube (PUT)

Features and Use

- Available for using between -20°C and 80°C
- Easy plumbing due to high flexibility
- Outstanding chemical resistance, water resistance
- Excellent weather resistance and flection resistance

Size	External Diameter (mm)	Inner diameter (mm)	W.P (kg/cm ² at 20°C)	Color
4 × 2	4	2	8	Blue, Transparency, Black, Blue-Transparency
6 × 4	6	4	8	"
8 × 5	8	5	8	"
10 × 6,5	10	6,5	8	"
12 × 8	12	8	8	"
16 × 12	16	12	7	"



Polyethylene Tube (PET)

Features and Use

- Non-toxic, available for restaurants and food factories
- High chemical resistant, suitable for chemical pipes
- Outstanding cold resistance, adequate for using in winter

Size	External Diameter (mm)	Inner diameter (mm)	W.P (kg/cm ² at 20°C)	Color
6 × 4	6	4	5	Blue
8 × 5	8	5	5	"
10 × 6,5	10	6,5	5	"
12 × 8	12	8	5	"
16 × 12	16	12	5	"



Nylon Tube (NT)

Features and Use

- High pressure resistance, durability of abrasion and flection resistance
- High chemical resistance, suitable for LPG, LNG and Gas pipes
- High chemical, especially high alkali, resistance

Size	External Diameter (mm)	Inner diameter (mm)	W.P (kg/cm ² at 20°C)	Color
4 × 2	4	2	8	Black, white
4 × 2,5	4	2,5	8	"
6 × 4	6	4	8	"
8 × 6	8	6	8	"
10 × 8	10	8	8	"
12 × 9	12	9	8	"
1/4	6,35	4,57	8	"
3/8	9,53	6,99	8	"
1/2	12,70	9,56	8	"

※ Different colour is custom-built.

Real Symbol of Reel **KOREEL**




Air Reel Braid Hose

Features and Use

- High flexibility
- Suitable for car service centers and construction sites where using tackler and impact
- Able to use at -20°C ~ 60°C

Size	E.D (mm)	I.D (mm)	W.P (kg/cm ² at 23°C)	Color
10 × 6,5	10	6,5	15	Orange
12 × 8	12	8	"	"
16 × 11	16	11	"	"

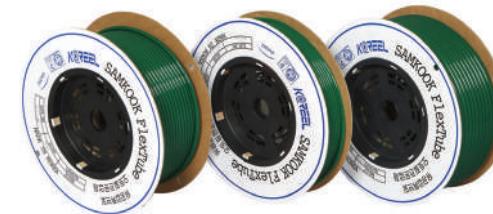


Portable Urethane Soft Hose

Features and Use

- Light and easy use for portable tackler
- Able to use at -20°C ~ 60°C

Size	E.D (mm)	I.D (mm)	W.P (kg/cm ² at 23°C)	Color
8 × 4,5	8	4,5	7	Orange, Green
10 × 6	10	6	7	"
12 × 8	12	8	7	"

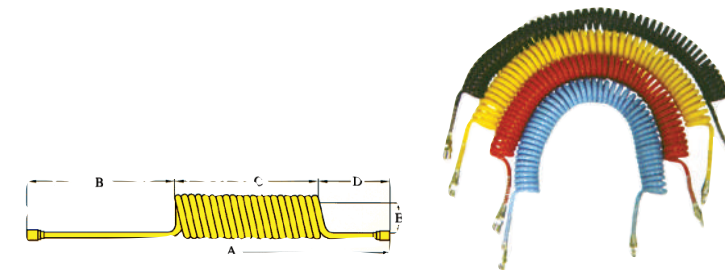

PU Coil Hose

(Polyurethane)

Features and Use

- Portable and light
- Cold resistance and impact resistance
- Easy use for air tools, lubricating device, pneumatic tools and tackler works.

Size	E.D (mm)	I.D (mm)	L (M)	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	W.P (kg/cm ² at 20°C)	Color
8×5×5	8	5	5	1,000	150	430	150	34	8	Yellow
8×5×7,5	8	5	7,5	1,230	150	630	150	34	8	Yellow, Blue
8×5×10	8	5	10	1,400	150	800	150	34	8	Yellow
10×6,5×5	10	6,5	5	1,000	150	400	150	42	8	"
10×6,5×7,5	10	6,5	7,5	1,235	150	635	150	42	8	"
10×6,5×10	10	6,5	10	1,400	150	800	150	42	8	"
12×8×5	12	8	5	990	150	390	150	60	8	"
12×8×7,5	12	8	7,5	1,190	150	590	150	60	8	"
12×8×10	12	8	10	1,380	150	780	150	60	8	"



PE Coil Hose

(Polyurethane)

Features and Use

- Portable and light
- Cold resistance and impact resistance
- Easy use for air tools, lubricating device, pneumatic tools and tackler works.

Size	E.D (mm)	I.D (mm)	L (M)	W.P (kg/cm ² at 20°C)	Color
8×5×5	8	5	5	5	Yellow
8×5×7,5	8	5	7,5	5	"
8×5×10	8	5	10	5	"
10×6,5×5	10	6,5	5	5	"
10×6,5×7,5	10	6,5	7,5	5	"
10×6,5×10	10	6,5	10	5	"
12×8×5	12	8	5	5	"
12×8×7,5	12	8	7,5	5	"
12×8×10	12	8	10	5	"

Change & Feel it

The innovation of industrial reels achieved by Koreel Co., Ltd.
Samkook Co., Ltd. will break fresh ground in industrial reels with the
exceptional quality and the best customer service.



Patents and Technology Certificates




CE
(hydraulic hose reel)



CE
(motor driver
type cable reel)



Certificate of the
research institute of
the company



Registration of
recommended high
quality product



AEO certificate



Quality guarantee
company by KOTRA



ISO 9001



ISO 14001